


# TL-WR841N v13 – Hotspot Router – PPPoE

Minimum Firmware version date code (170814)


1. Connect **power** to the router and **turn it on**.
2. Connect a computer to the router with either:
  - a. An **Ethernet cable** to a yellow port.
  - b. The **WiFi info** on the bottom of the router.



3. Open browser and go to **tplinkwifi.net** **Login with username: "admin" and password "admin"**

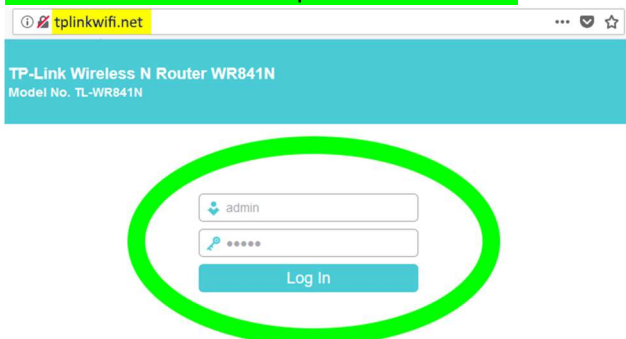


4. On **Quick Setup – Start**, hit **Next**. (If the Quick Setup isn't showing, hit **Quick Setup** on the left.)

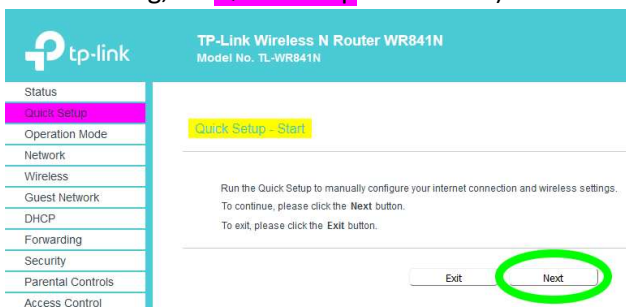

5. On **Quick Setup – Operation Mode**, choose **Hotspot Router** and hit **Next**.




6. On **Quick Setup – Wan Connection Type**, choose **PPPoE/Russia PPPoE** and hit **Next**.

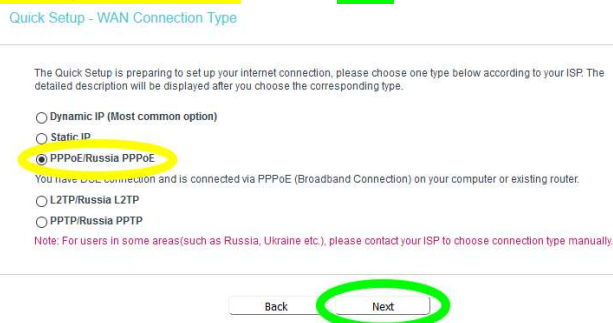

7. On **Quick Setup – PPPoE**:

- a. Enter **Username** \_\_\_\_\_
- b. Enter **Password** \_\_\_\_\_  
in both boxes.
- c. Hit **Next**.

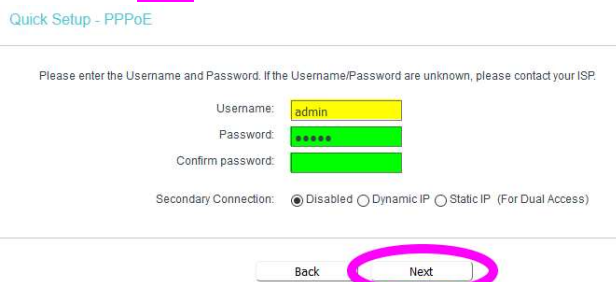

8. On **AP List**, look through the **SSID column** for \_\_\_\_\_ and click on **Connect** for that row.

ID	BSSID	SSID	Signal strength	Channel	Encryption	Connect
1	00:13:92:60:08:50	Cactus-Wireless_WPA	86	11	WPA-PSK/TKIP	Connect
2	00:13:92:E0:08:50	Cactus_Hotspot_A	86	11	WPA2-PSK/AES	Connect
3	00:13:92:40:08:50	Cactus_Hotspot_PPPOE	86	11	None	Connect
4	00:13:92:20:08:50	Cactus_Hotspot_WEP	86	11	Open System/WEP	Connect
5	D4:9E:0E:F8:40:2E	PCRE_2	67	4	WPA2-PSK/AES	Connect
6	10:9F:A9:15:7C:ED	PCRE	62	11	WPA2-PSK/AES	Connect
7	C0:25:E9:5F:04:84	NaturistStudio	60	4	WPA2-PSK/AES	Connect
8	66:D1:54:77:EE:C1	Colters Creek - Guests	57	1	WPA2-PSK/AES	Connect
9	28:CF:DA:B1:CF:BD	FRANKIE	51	11	WPA2-PSK/AES	Connect

9. In the **Client Setting** section:

- a. Double check the **SSID**
- b. If the network you are connecting to is secured, enter the **Wireless Password**.



# TL-WR841N v13 – Hotspot Router – PPPoE

Minimum Firmware version date code (170814)

10. Scroll down to the **AP Setting** section:
  - a. Make up your own wireless network name and password.
  - b. Enter them in **Local Network SSID** and **Wireless Password**.
  - c. Hit **Next**.

Key Type:  No Security

---

**AP Setting**

Local Network SSID: TP-Link\_D798

Security:

WPA2-PSK (Recommended)

Wireless Password: 36517237  
(Enter ASCII characters between 8 and 63 or Hexadecimal characters between 8 and 64.)

Disable Wireless Security

11. **Review your choices** and hit the **Finish button** at the bottom.

Wireless Settings

Operation Mode: Hotspot

Wireless Channel: 11

Wireless Network Name(SSID): TP-Link\_D798

Wireless Security Mode: WPA2-PSK

Wireless Password: 36517237

---

LAN Settings

Default Access: http://tplinkwifi.net

LAN Type: Static IP

IP Address: 192.168.0.1